


PLAN VIEW

REINFORCING PER RC-46M STANDARDS

SECTION A

TRANSITION SLAB THICKER IN MIDDLE TO LOCK INTO WALLS

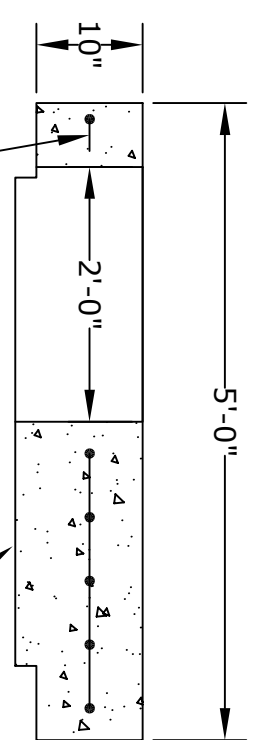

- NOTES**
1. CONCRETE - 4000 psi, AIR ENTRAINED
 2. REINFORCING STEEL - GRADE 60, ASTM A-615
- REINFORCING BASED ON PENNDOT RC-46M
 3. MEETS PENNDOT RC-46M SPECIFICATIONS
PUB. 408 SECTION 714
 4. ALL MATERIAL USED MADE IN THE USA

Altomare Precast, Inc.
 4300 Wissahickon Avenue
 Philadelphia, PA 19129
 PH: 215-225-8800 FAX: 215-225-8900

TITLE:
 Type 4 Inlet
 Capping Slab
 w/ 2'x2' Frame/Grate

PROJECT:
CONTR:
DATE: